


Structure **DH3WZ/BF**



Orders of 50 kW and above

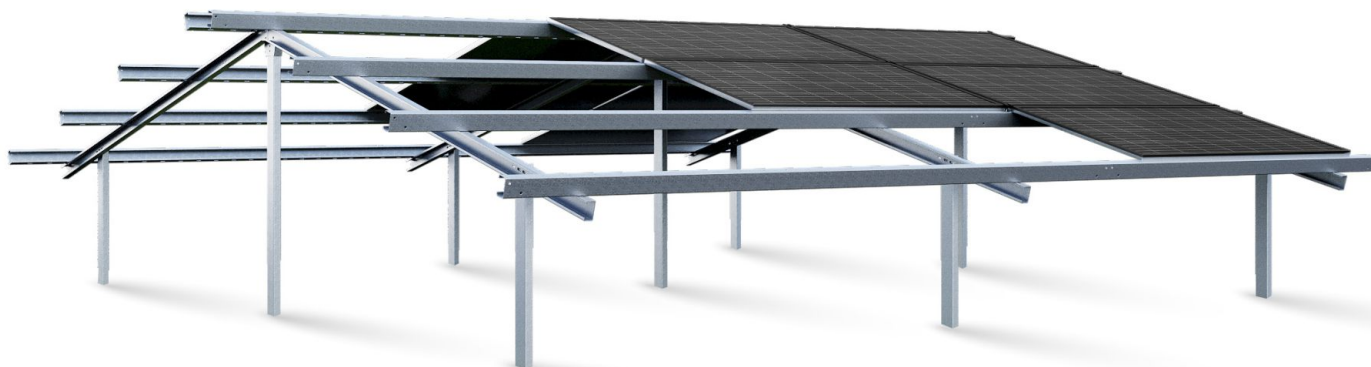


Magnelis®

Anti-corrosion coating

15°

Inclination angle:
15°



Module arrangement:
Horizontal three-row
two-plane

Specifications:

Material:	S350 high-strength structural steel
Anti-corrosion coating:	Magnelis ®
Warranty on construction and coating:	20 years
Technology:	Suitable for mounting any PV module Compatible with bifacial panels.
Application:	Farms and micro installations
Structural standards:	PN-EN 1990 i PN-EN 1993

Profile:

Pole: C100x48mm	Purlin: C100x48mm
Purlin: C100x60mm	Fasteners: A2- 70
Clamps: Silver or black ALU EN AW- 6063	

Additional options:

Inverter mount	Mounting to ballast (prefabricated ballasts)
Additional braces	Mounting to concrete ground
Tilt angle 25° to 35°	