


Structure **DH5/BF**

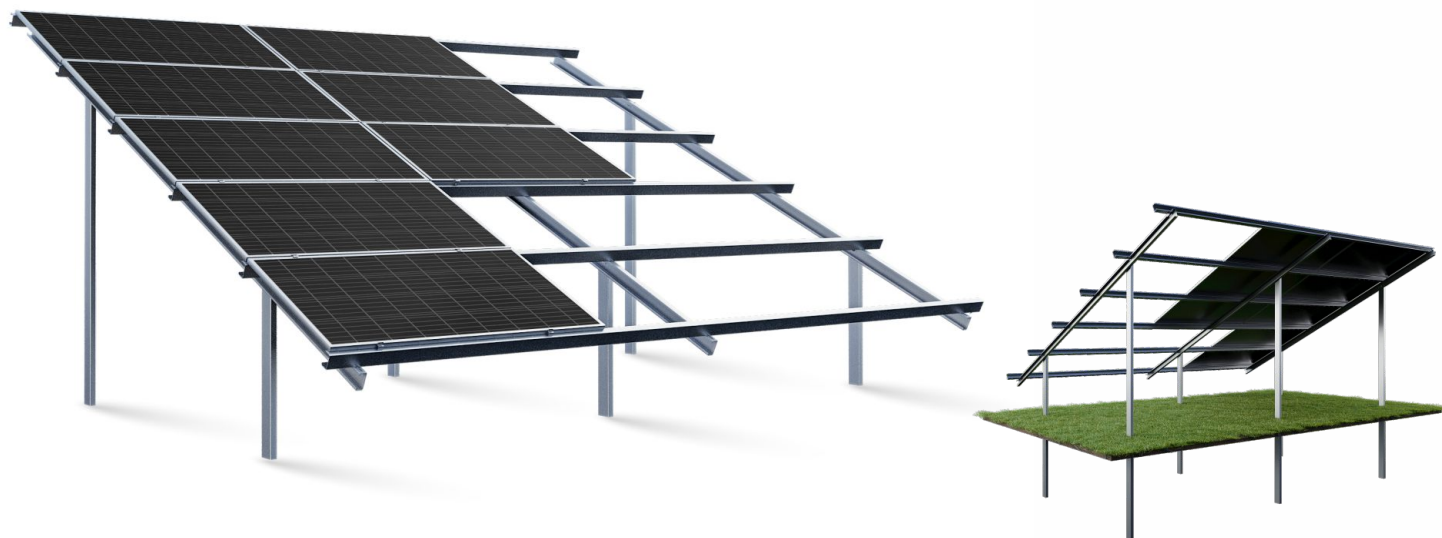


Magnelis®

Anti-corrosion coating

25°

Inclination angle:
25°



Module arrangement:
Horizontal five-row



Snow load zone:
1, 2, 3
(up to 300 m)



Wind zone:
1, 2, 3
(up to 300 m)

Specifications:

Material:	S350 high-strength structural steel
Anti-corrosion coating:	Magnelis ®
Warranty on construction and coating:	20 years
Technology:	Suitable for mounting any PV module
Application:	Compatible with bifacial panels.
Structural standards:	Farms and micro installations PN-EN 1990 i PN-EN 1993

Profile:

Pole: C100x60mm	Purlin: C100x48mm
Purlin: C100x60mm	Fasteners: A2- 70
Clamps: Silver or black ALU EN AW- 6063	

Additional options:

Inverter mount	Mounting to ballast (prefabricated ballasts)
Additional braces	Mounting to concrete ground
Tilt angle 25° to 35°	